

eezeeFAX

- Network Faxserver -

Product Information



- **Internal Transfer**

All faxes can be transfer internally easily by selecting the user's name on the list.


- **Fax Status**

The web interface indicates the real time fax status which helps user to easily identify the status of the fax line(s).

- **Fax to Email**

All received fax will be automatically sent to user's folder. It also can be set up to send to send them as a tiff- or pdf-file attachment to the users email account.

Account Settings:

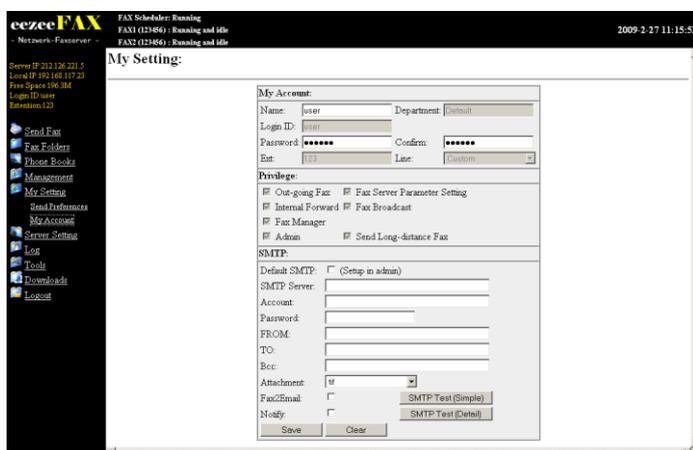

- **Email to Fax**

User can send faxes from anywhere where they have an internet connection. Add the fax as an attachment to an email and the fax server will automatically convert the email to a fax and forward it to the destination fax machine.

- **Print2Fax**

Print2fax is a Windows print monitor designed to send its output directly to the eezeefax server. Once installed, you can, from any application, just print to the eezeefax print driver and it will pop up a simple dialog box, allowing you to enter the destination fax number. It is an easy way to send FAXes from any Windows application.

System-Administration and Mgmtnt

- **User Management**

Administrators can set up different user accounts, passwords, management authorities, attributes, lines, document formats and email addresses.

- **Address Book**

eezeefax has its own address books – both shared and private to each user. Contacts may be grouped together into fax lists for fast distribution of information using just a few clicks.


- **Fax Monitoring**

Administrators can monitor all incoming or outgoing faxes.

- **System Log**

eezeefax provides various system logs for the administrator. This includes information about user login, faxes sent, received faxes, fax distribution and internal transmit. All logs can be exported to excel format.

Line Settings:

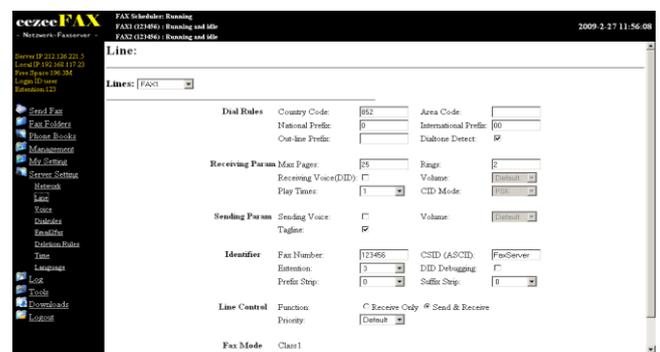

Main Features

- **Easy Setup**
eezeeFAX network fax server is integrated in a box. No major technical skills are required to setup the server.
- **Desktop Faxing**
eezeeFAX network fax server allows you to easily bring the fax functionality to everyone in your company so that they can send and receive faxes while sitting at their desks.
- **Operates Independently**
The system works completely stand-alone; no server side software is required. Faxes are stored in the memory of the eezeeFAX network fax server.
- **PBX Integration**
Once installed behind your PBX, eezeeFAX is able to listen to DTMF code generated from the PBX system. This allows the automatic delivery of faxes via PBX settings or analog DID/DDI services.

- **Network Fax Sharing**

eezeeFAX runs in normal TCP/IP networks. Users can share faxes and files within their local LAN or even within the internet. Using eezeeFAX saves time, helps to more efficient communication and also saves costs.

- **CSID Support**


User can identify the source of fax by determining the CSID which allows automating the distribution of faxes.

- **“Multi-line” Support**

A variety of models, differentiated by the number of lines, help adapt to different types of customers and requirements:

- „eezeeFAX - mini“ supports 1 external fax line.
 - „eezeeFAX - midi“ supports 2 external fax lines.
 - „eezeeFAX - maxi“ supports 4 external fax lines.
- Multi-line models can send several faxes simultaneously.

Connection Diagram:

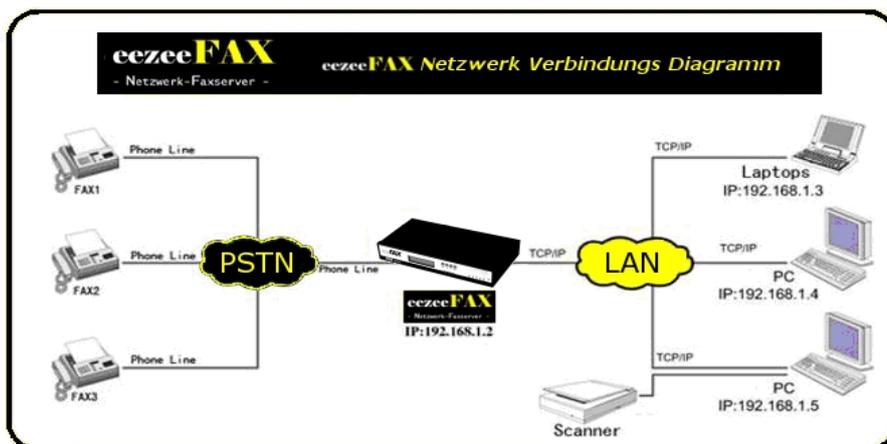

APLIGO GmbH | Haid-und-Neu-Str. 5a | 76131 Karlsruhe/Germany | Managing Directors: Marc Emminger, Michael Kugland
E-Mail: info@APLIGO.com | Web: <http://www.APLIGO.com> | Phone: +49 (0) 721 / 96 90 03-0 | Fax: +49 (0) 721 / 96 90 03-19

- Product Specifications -

eezeeFAX	- mini -	- midi -	- maxi -
Fax Lines	1	2	4
User (max.)	20	50	100
Memory	256MB	256MB	512MB
Fax Storage	2.000 Pages	3.000 Pages	6.000 Pages
Network Protocol	TCP/IP		
Network Interface	RJ45		
Network Speed	10/100M		
Fax Line Interface	RJ11		
Fax Line Type	PSTN		
Fax Speed	14.4K / 12K / 9.6K / 7.2K / 4.8K / 2.4K		
Fax Resolution	98 / 196DPI		
Fax Compression	MMR, MR, MH		
Fax Standard	ITU-T G3 / G4		
Fax Routing	Line / CSID / Extension / Caller-ID		
DID/DDI Digit	(User defined -- 1, 2, 3, 4, 5, ..., 15)		
OS Support	MS Windows / Mac / Linux		
Browser Support	Internet Explorer / Firefox / Netscape		
Language	German, English		
Remote Access	supported		
Document Format	TIFF / PDF		
Rackmount Option	No	Yes	
Dimensions	280 * 150 * 45mm		450 * 235 * 45mm – 1 HE
Power supply	external, 12V DC, 1A		internal, 90-240VAC
Weight	1,8 kg		3,7 kg
Certifications	CE, FCC		



If you have any questions, feel free to contact us through our website <http://www.eezeefax.de> or send us an Email to: info@apligo.com.